


## Spraywater Stop Valve type ASV

200 MW / 300 MW / 600 MW / 750 MW / 1000 MW

- High-pressure valve
- DN 15 – 200
- PN 10 – 400 / ANSI Class 150 - 2500
- Flow to close plug
- Parabolic plug
- Low actuating force
- Low maintenance efforts

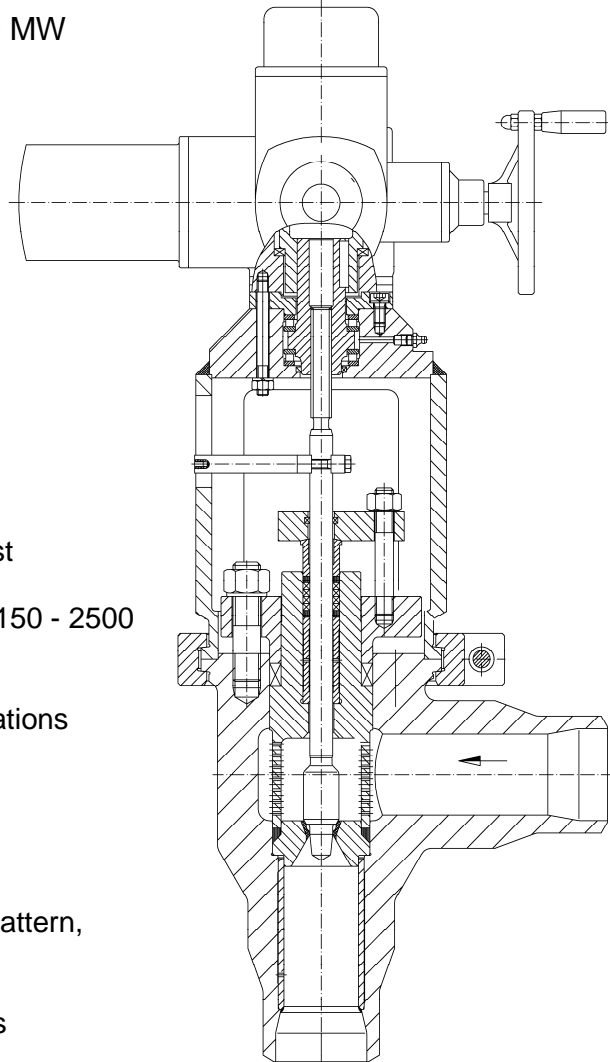

DN:	15 / 1/2" – 200 / 8" other sizes on request
Rating:	PN 20 – 400 / Class 150 - 2500
Control Range:	1:25, 1:30, 1:50 according to specifications
Control characteristic:	on - off
Design:	forged steel-welding construction, angle form, straight pattern, z-type
Connections:	welding ends, flanges
Actuators:	hydraulic actuators, pneumatic actuators, electric actuators according to specifications

All materials according to DIN or ANSI / ASTM. For the main parts of our valves we use standard material as listed below or according to our customer specifications.

### Standard materials

Forged material:	1.0460	1.4903	1.4922	1.5415
	1.7335	1.7380		

### **Material according to specification!**